

C3 Server Settings

Date: May 8, 2024 V1.0.1

1. Login the XUI panel by **http://your server ip:54321** after your bonding server built.

default username: **admin** Password: **Mine123456**

You can change the username and password from the **panel settings - user settings** if needed. [image2]

your server ip:54321

X-UI ENGLISH LOGIN

LOGIN

Language: us English

System Status

Inbounds

Panel Setting

Other

Log Out

Save Restart Panel +

Panel Configuration User Setting

Current Username:

Current Password:

New Username:

New Password:

Confirm

Image 2

2. Select the left "Inbounds" tab and click the  to add inbounds for your C3 device.

2.1 for the **Protocol**, select the **vless**.

2.2 In the **Total traffic (GB)** box, 0 means no limit.

2.3 the expire date of the inbound rule.

2.4 Transmission select the **ws**

2.5 The port 54322 is used for aggregating traffic. It is recommended to set this port to 54322. Please ensure that the C3 Bonding server port 54322 is opened accordingly. Others keeps them as default, click **[Add to]** to save the Inbounds.

Add Inbounds

X

Remark: C3

Enable: ☒

Protocol: vless

Listening IP ?:

Port: 54322

Total Traffic(GB) ? : 0

Expiry date ? : Select date

> Add Client

fallbacks: +

Transmission: ws

acceptProxyProtocol: ☐

Path: /

Request header: +


TLS: ☐

sniffing ? : ☒


Close

Add To

3. By clicking **Check** and **copy link**

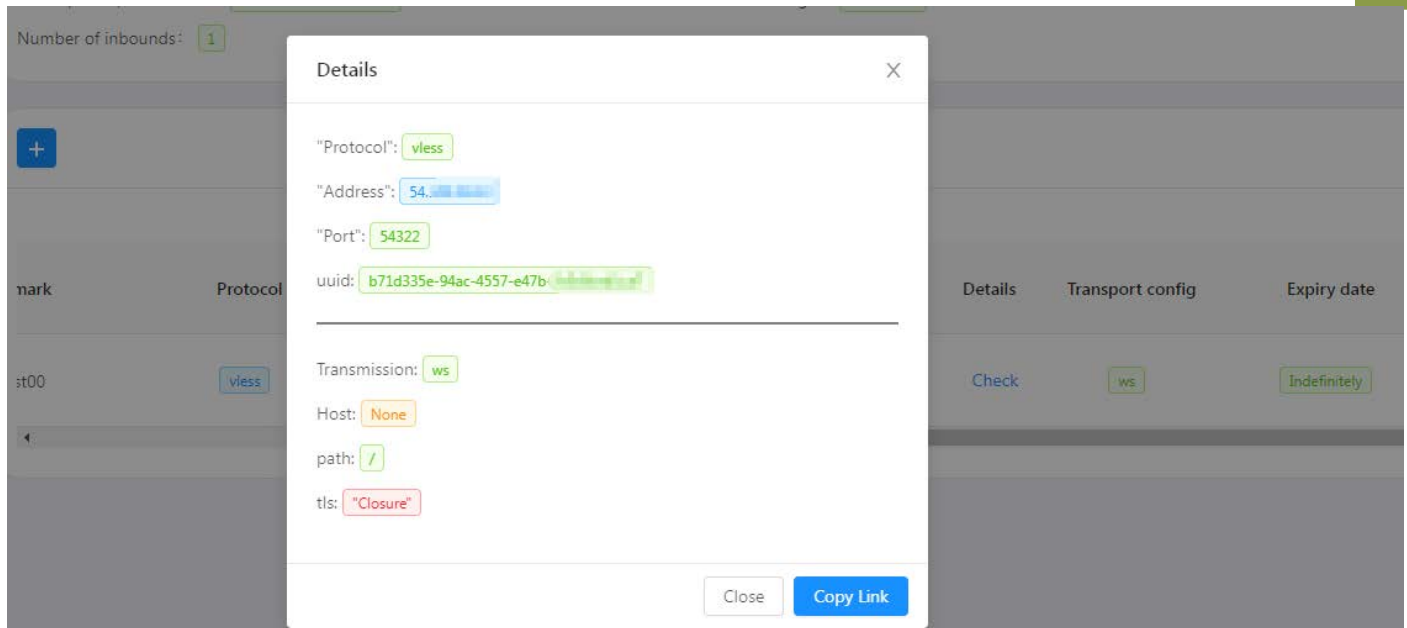

4. Paste the link to C3 Subscribe address (**Advance Settings - Bonding Setting**), and click to Save it. Connect to C3 LAN port with pc, and login to its management panel by http://192.168.6.1, default password is admin, or connect its WiFi C3-2.4G-xxx or C3-5.8G-xxxx, WiFi default password is 12345678

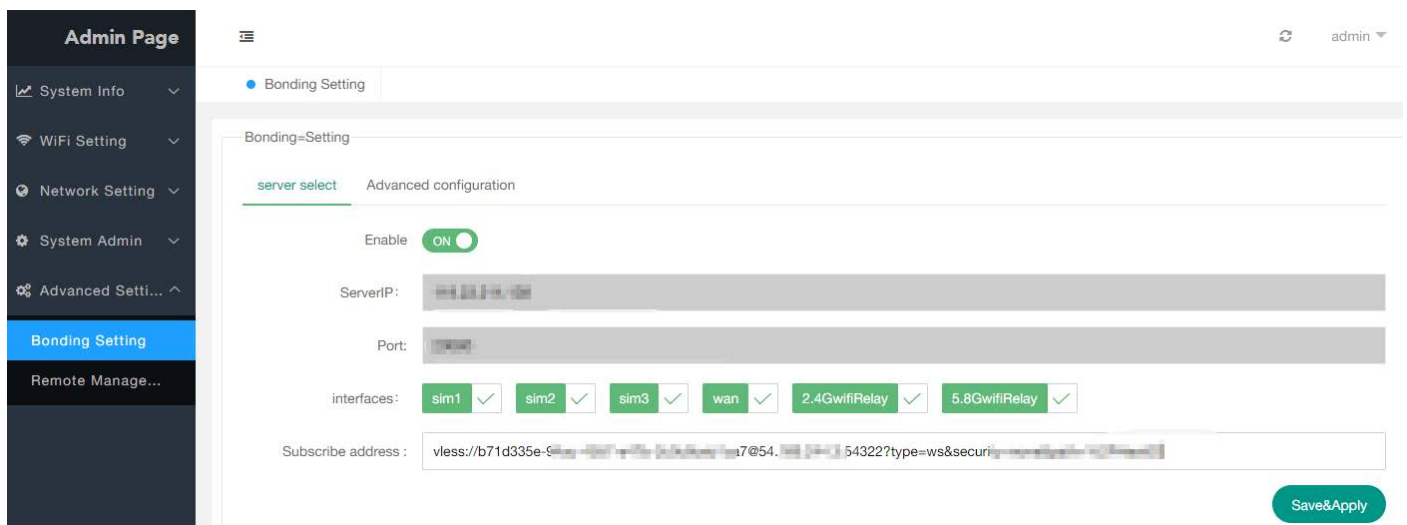

5. After a brief wait, the page will refresh automatically, presenting the server's IP address and port details.

